


DESIGNED FOR RESIDENTIAL APPLICATION

PW330_(K) / PW330L_(K) / PW230_(K)

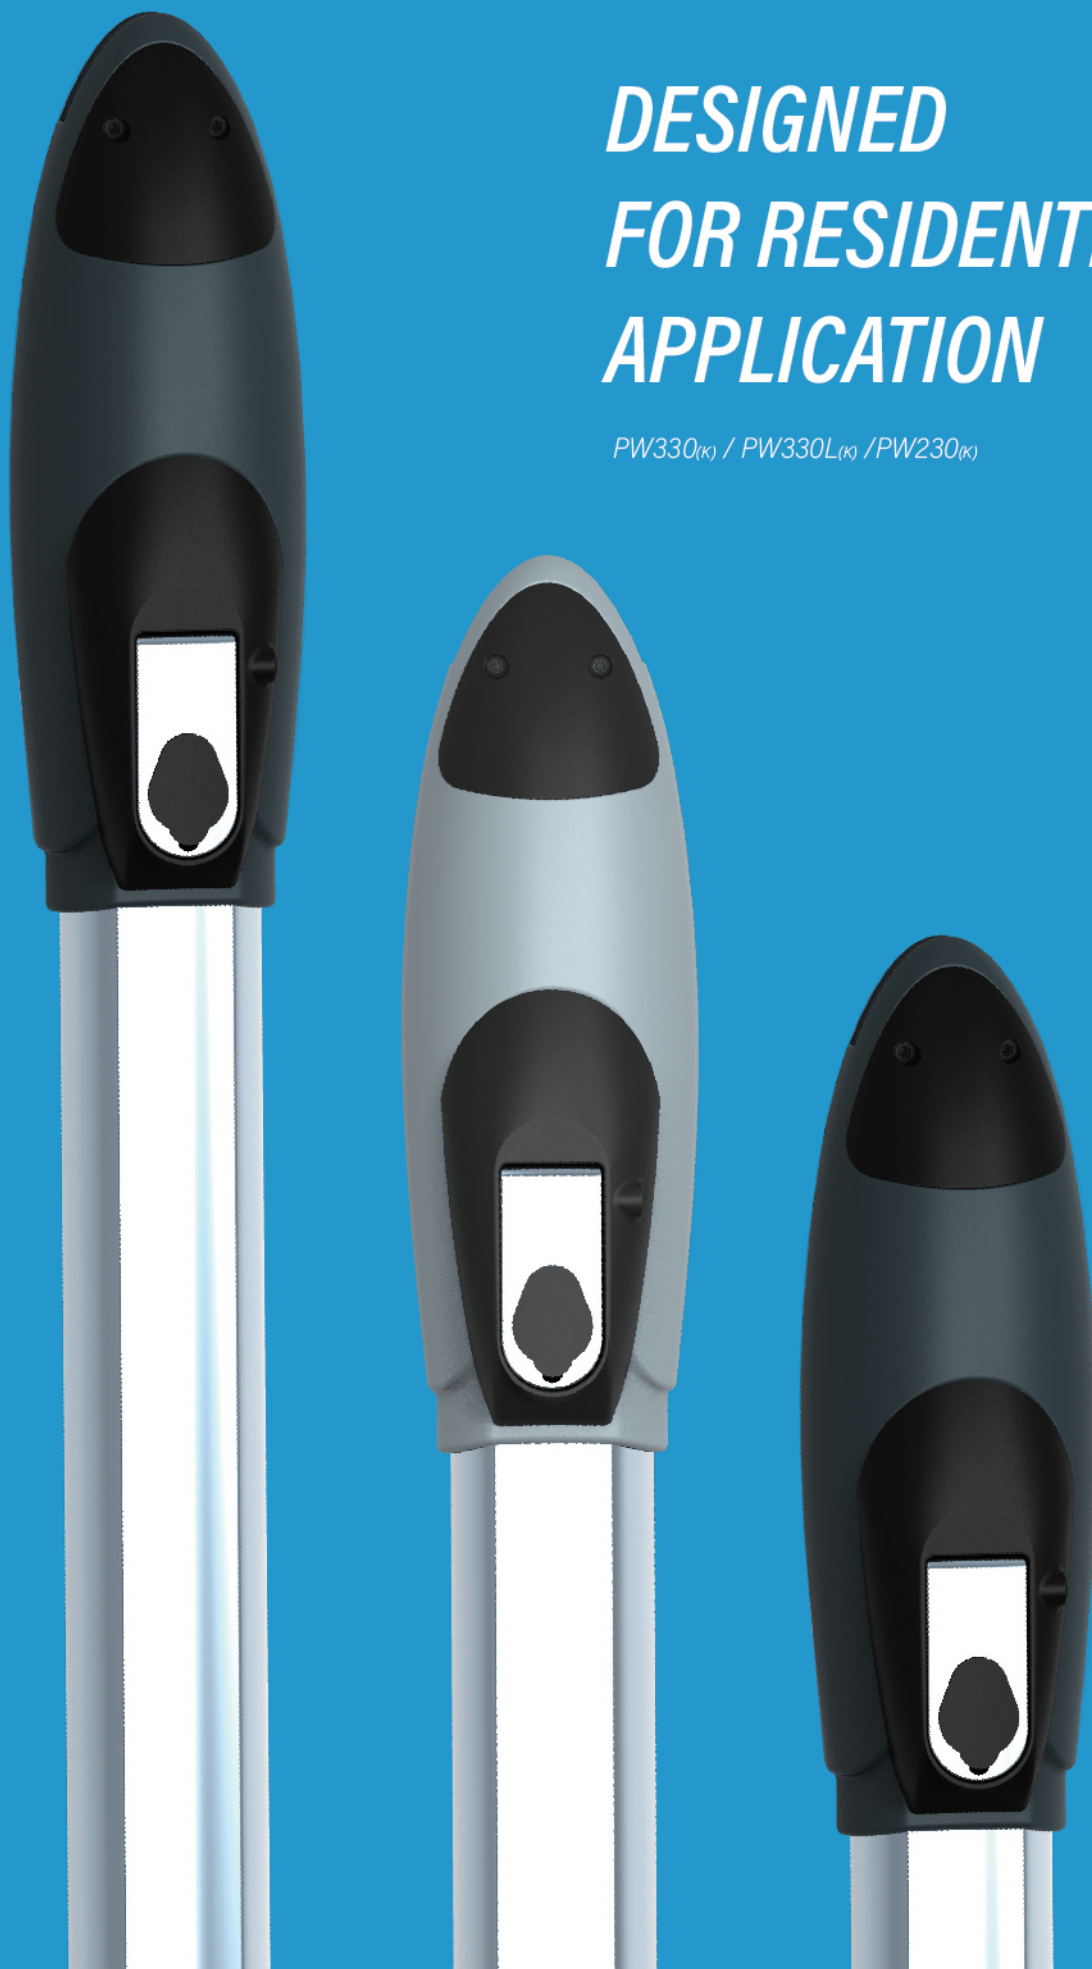

DESIGNED FOR RESIDENTIAL APPLICATION

PW330_(K) / PW330L_(K) / PW230_(K)

Worm gear provides durability and silence in motor operation.
Hall sensor imbedded in the gear motor for easy system learning.
Slowdown during the end of opening and closing phase.
Single-gate or dual-gate installation is optional.

PW330K



PW330LK



PW230K



Specifications

Motor	PW330 (K)	PW330L (K)	PW230 (K)
Gear Type	worm gear	Worm gear	Worm gear
Peak Thrust	3500N	4500N	3000N
Nominal Thrust	3000N	4000N	2500N
Stroke Length	350mm	540mm	350mm
Nominal Input Power	24Vdc	24Vdc	24V DC
Maximum Gate Weight	350kg per leaf	400 kg per leaf	300 kg per leaf
Maximum Gate Length	4meters	4 meters	3 meters
Operating Temperature	- 20°C ~ + 50°C	-20°C~+50°C	-20°C~+50°C
Dimension	844mm*115mm*114mm	1039mm * 115mm * 106mm	844 x 115 x 106mm
Weight	6.25kg	8kg	6.25kg

CONTROL IT ALL WITH

eyeopen

